


HARDWARE INCLUDED

All hardware shown to scale.
Fasteners can be identified by number of stripes.

STRIPED LONG FASTENERS

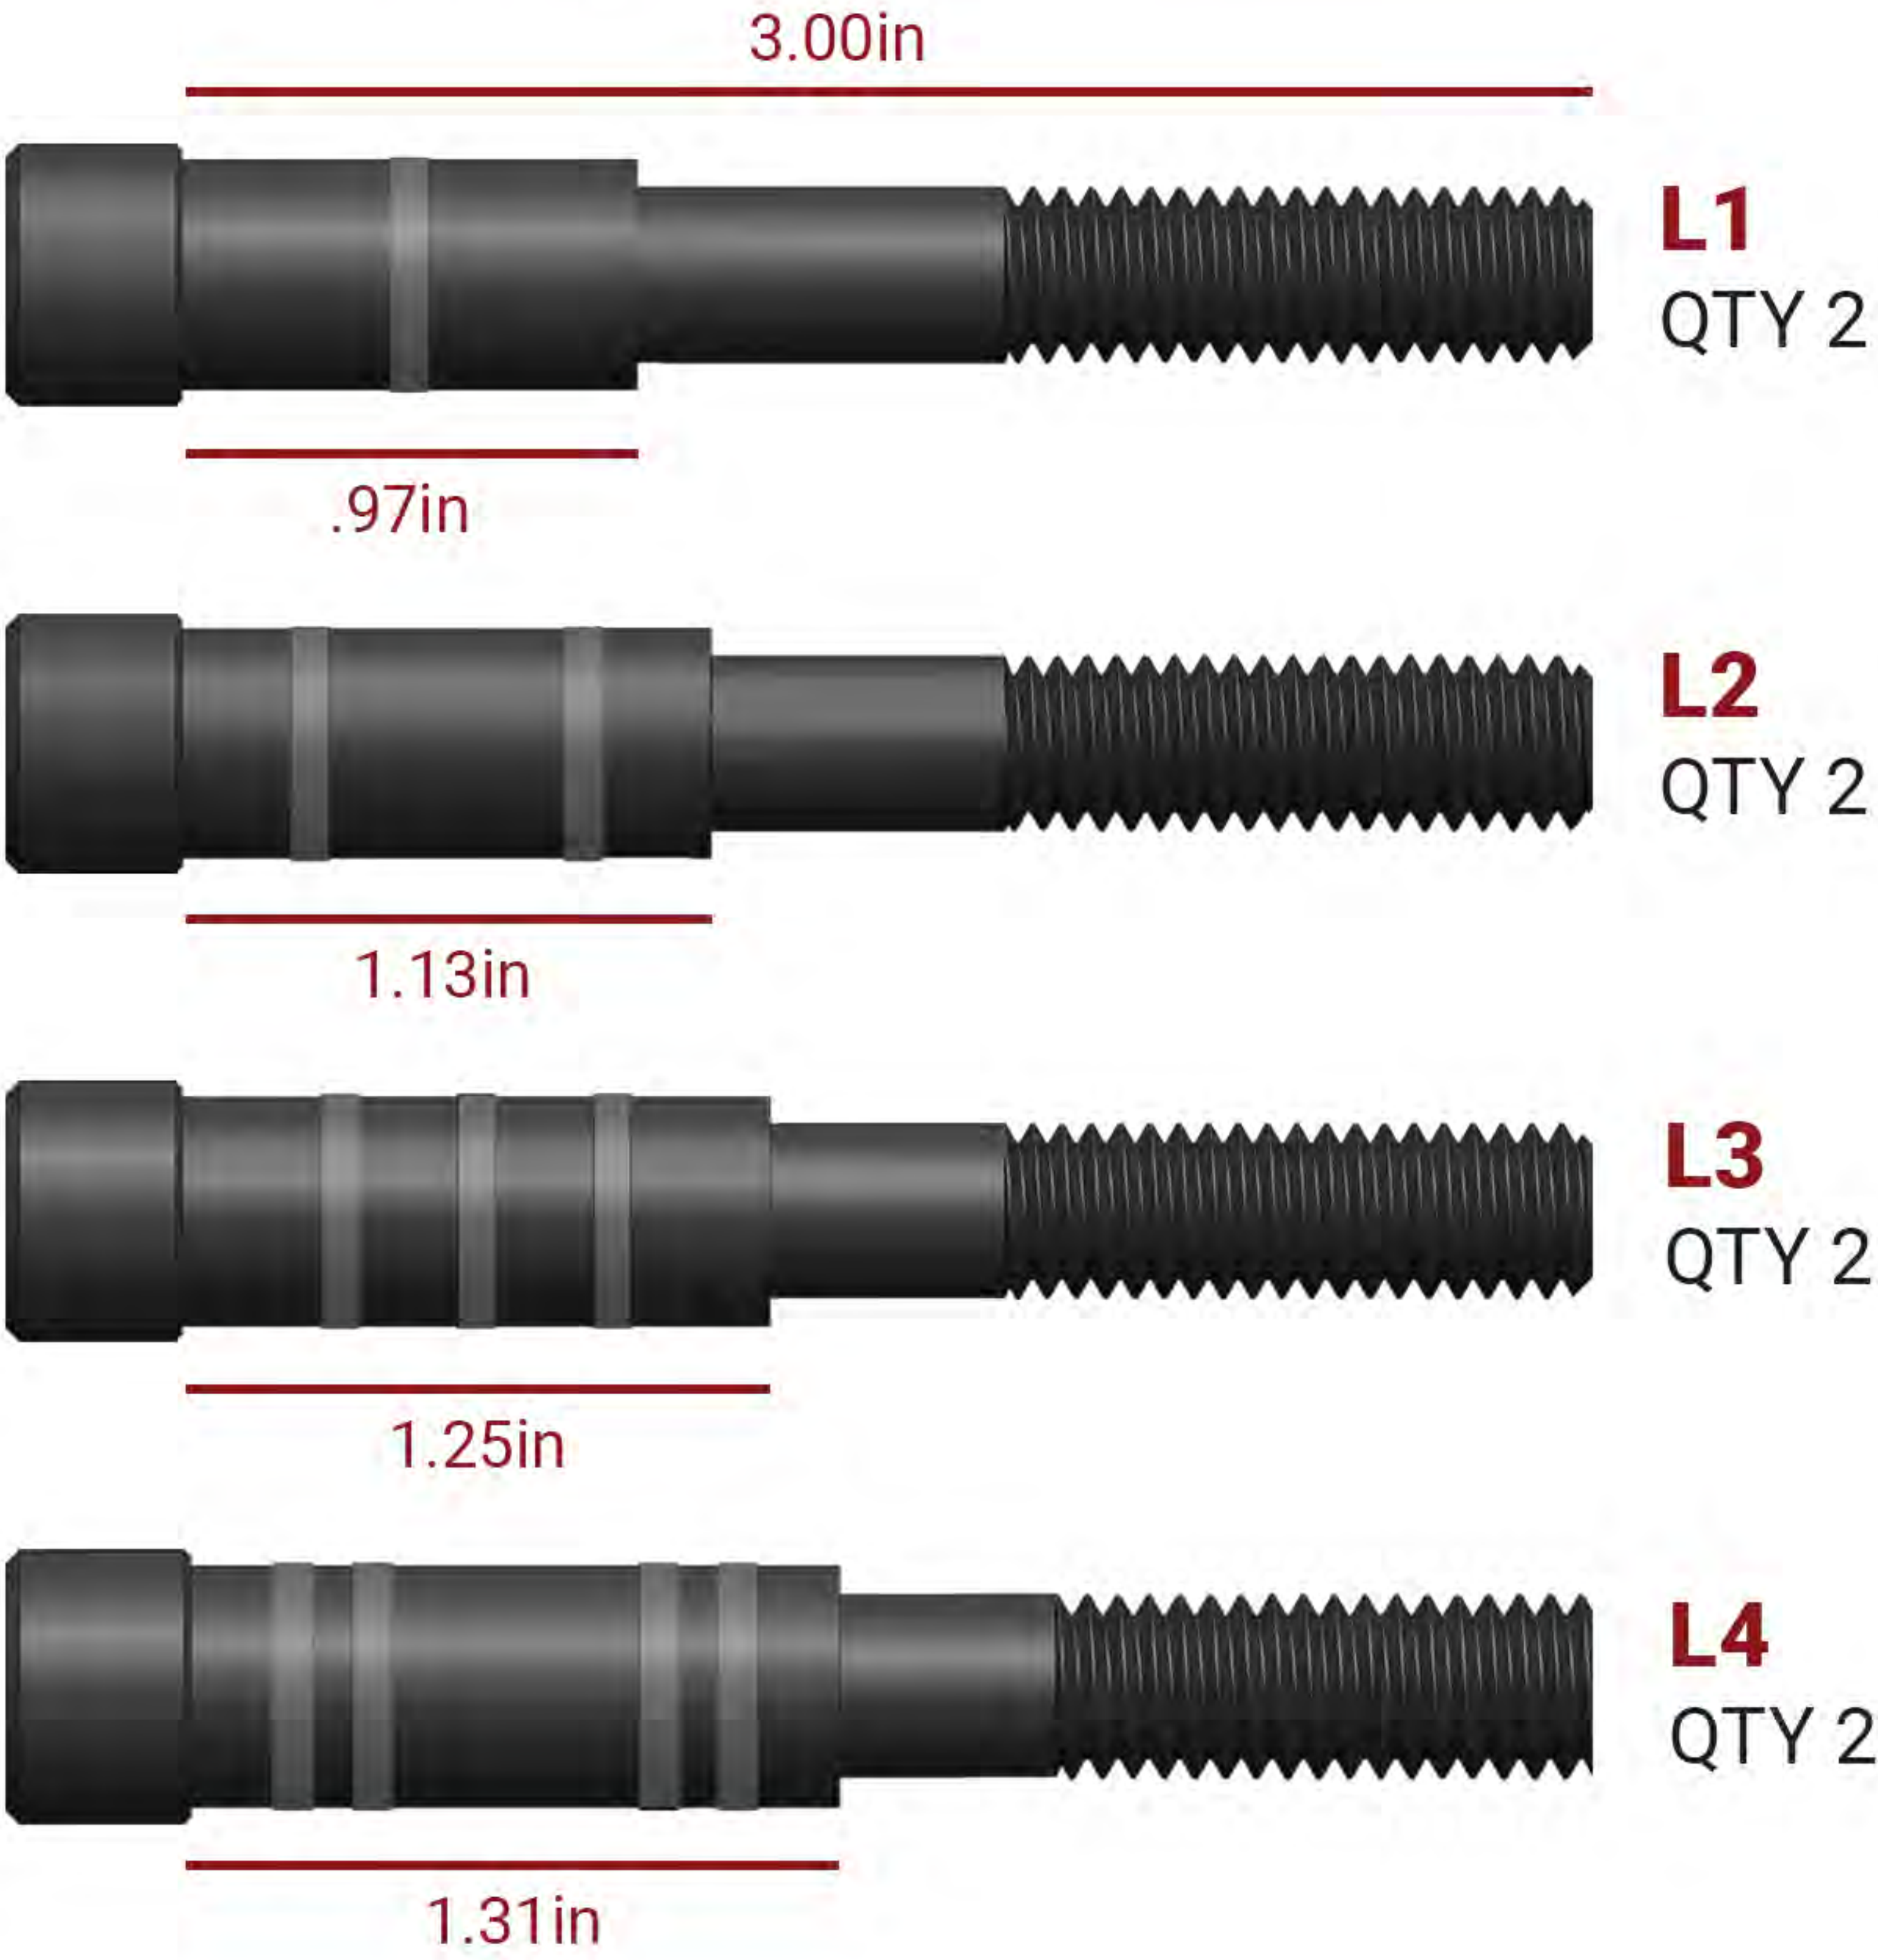


STRIPED SHORT FASTENERS



* Additional washers provided for use as needed in step 6

PARTS INCLUDED

- | | | |
|-------------------------------|--------------------|--------------------------------|
| D Driver | P Passenger | 54D/54P Rear Uprights** |
| 51D/51P Front Uprights | | 55 Top Center |
| 52D/52P Arm Rests | | 56 Top Ends |
| 53D/53P Hex Mounts | | 57 Canvas Top |

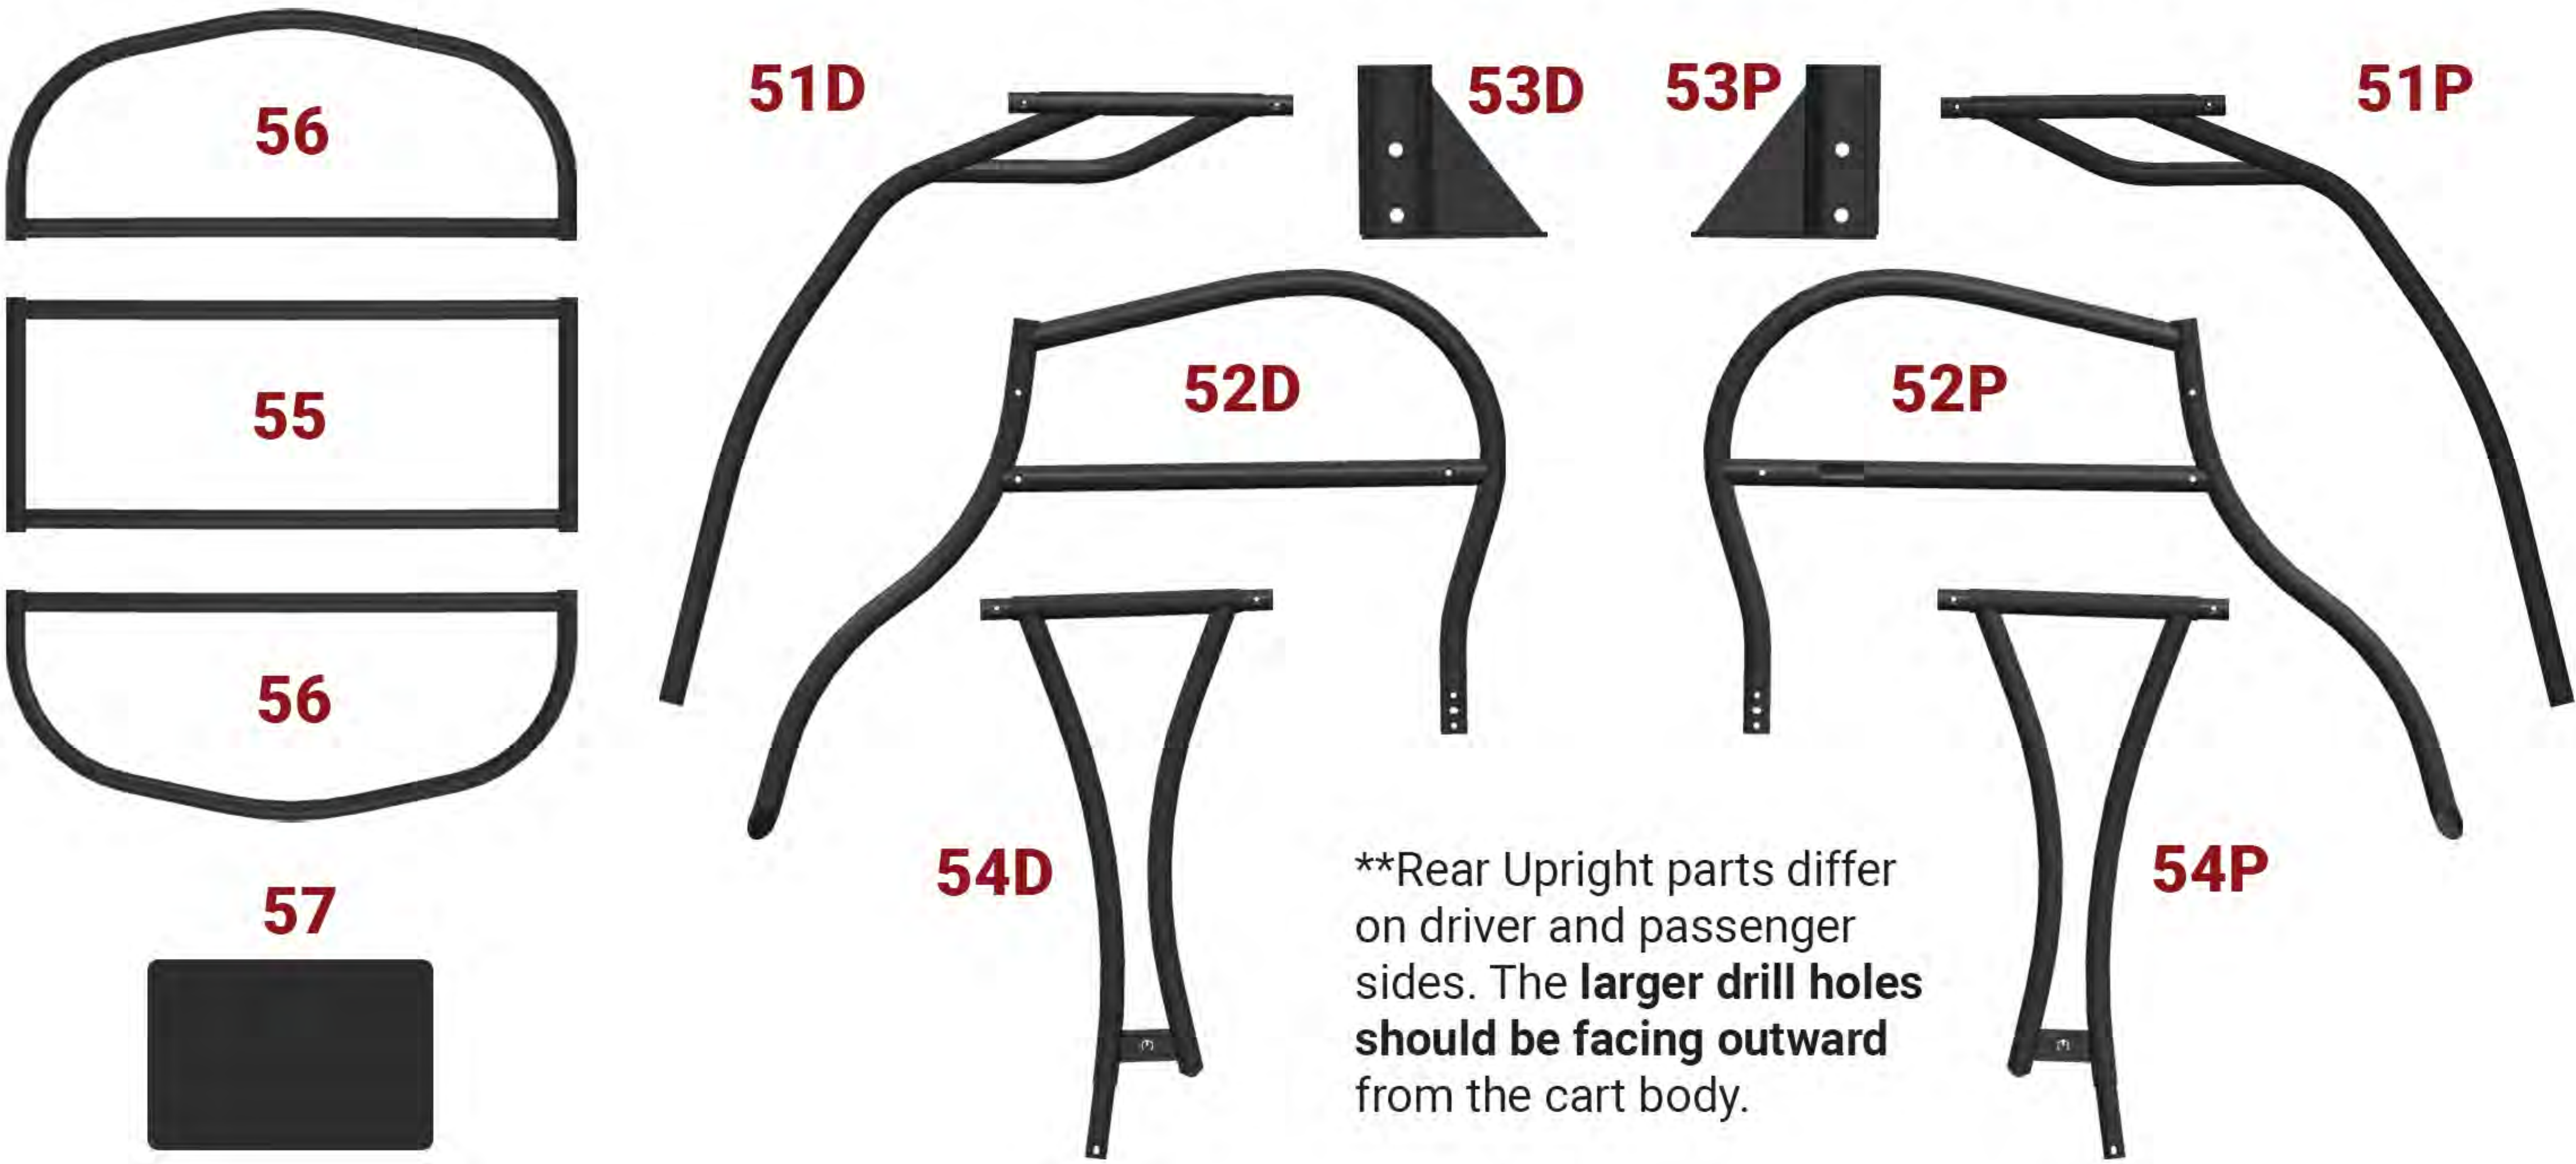

Rear Upright parts differ on driver and passenger sides. The **larger drill holes should be facing outward from the cart body.



INSTALLATION MANUAL

FOR CART MODELS: YAMAHA DRIVE II
+ REAR SEAT MODELS: FLIP4 / GTW / GEN 150



Need assistance?

Tech Support:
844-MODZ-USA

WARNING:

Please have installation performed by a professional mechanic. This roof system is not load-bearing. This roof system will not provide protection in the event of a rollover. Do not carry items or persons on top of the roof system. Installation of the roof system will raise the vehicle's center of gravity. Please use extreme caution when encountering driving conditions which may cause vehicle imbalance. It is imperative that the operator and passengers remain seated, keep their arms and legs within the vehicle, and wear a seatbelt. It is the owner's responsibility to caution and warn any potential driver of the vehicle about these driving and handling conditions. Golf Cart King advises that you check your state and local ordinances prior to installing a suspension kit or other aftermarket vehicle modification.


CALIFORNIA PROP 65 WARNING:

WARNING: Operating, servicing and maintaining a passenger vehicle or off-highway motor vehicle can expose you to chemicals including engine exhaust, carbon monoxide, phthalates, and lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. To minimize exposure, avoid breathing exhaust, do not idle the engine except as necessary, service your vehicle in a well-ventilated area and wear gloves or wash your hands frequently when servicing your vehicle. For more information go to www.P65Warnings.ca.gov/passenger-vehicle.

ASSEMBLY INSTRUCTIONS

We recommend using Metal Silicone Sealant when installing the Tower Top. Simply apply sealant to male/female connections to reduce overall noise and movement.

1

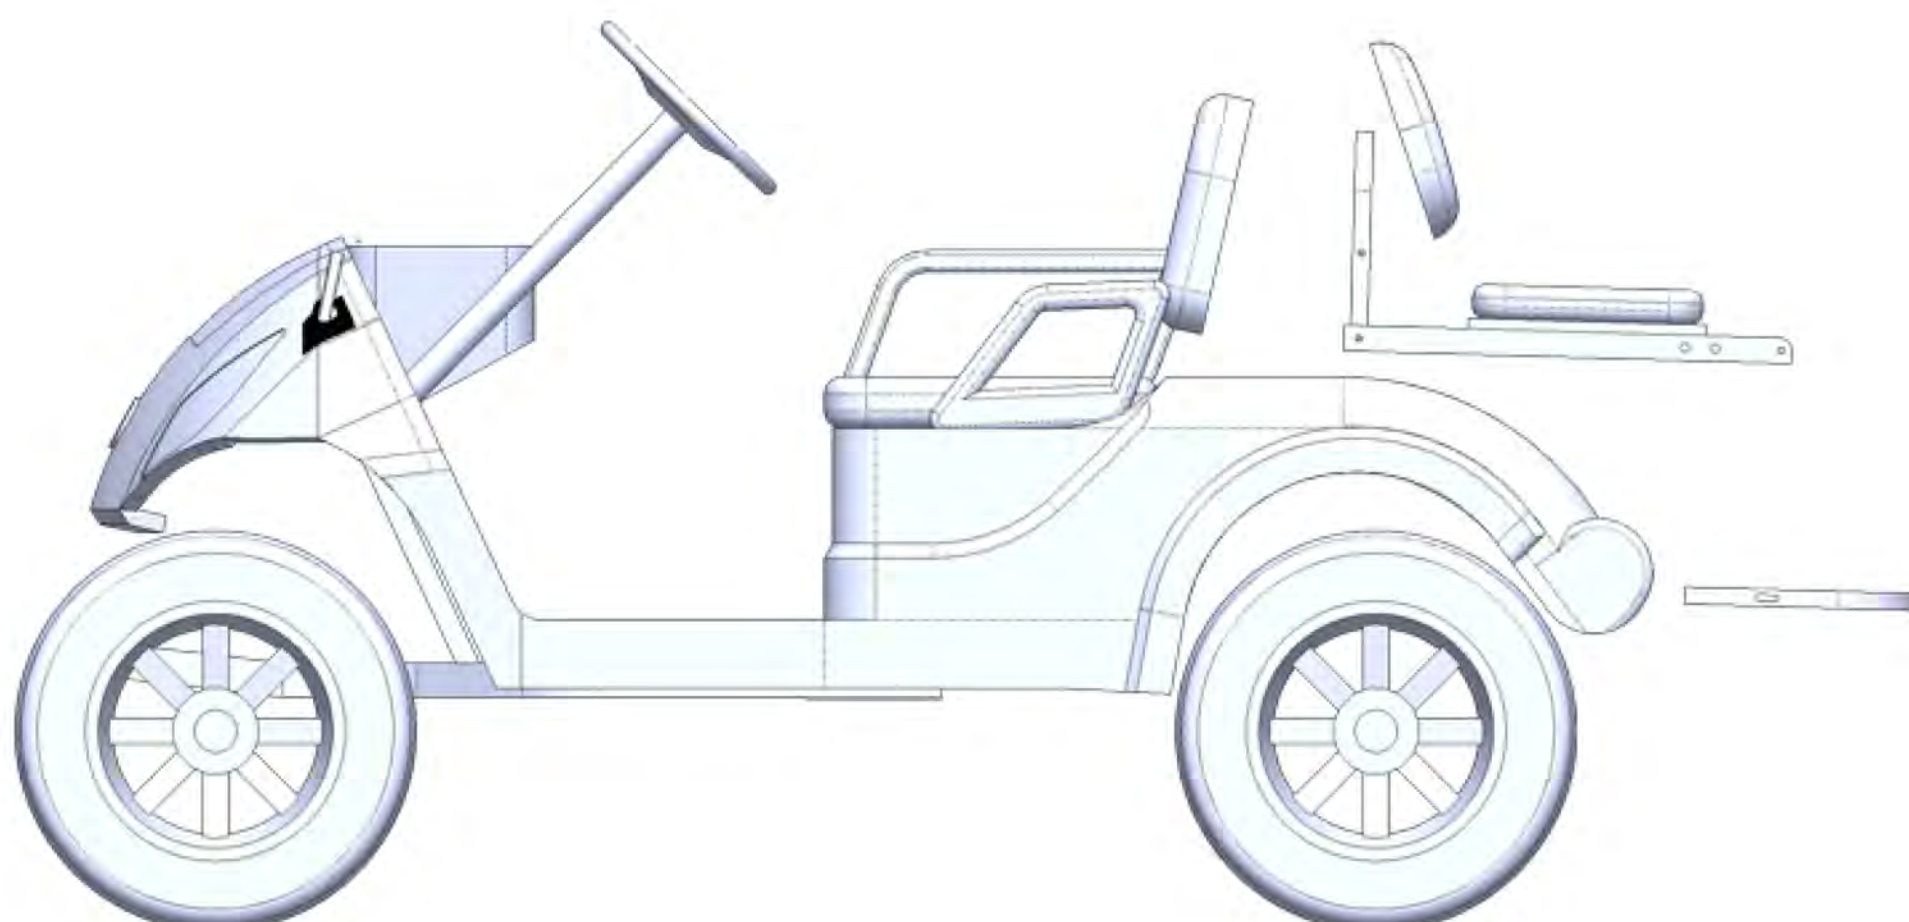


Remove the factory top, uprights, and rear seat arm rests from the cart body and retain the original hardware (below) on both the driver and passenger side to use for your Front Upright installation:

- Flanged Button Head Cap Screw, M8 x 1.25 x 20 lg Used for front uprights. (QTY 4)
- 10mm Washer. Re-use for Arm Rests (QTY 4)
- 11mm Rubber Washer. Re-use for Arm Rests (QTY 2)

2


Loosely assemble **Front Uprights**. **51D/51P**

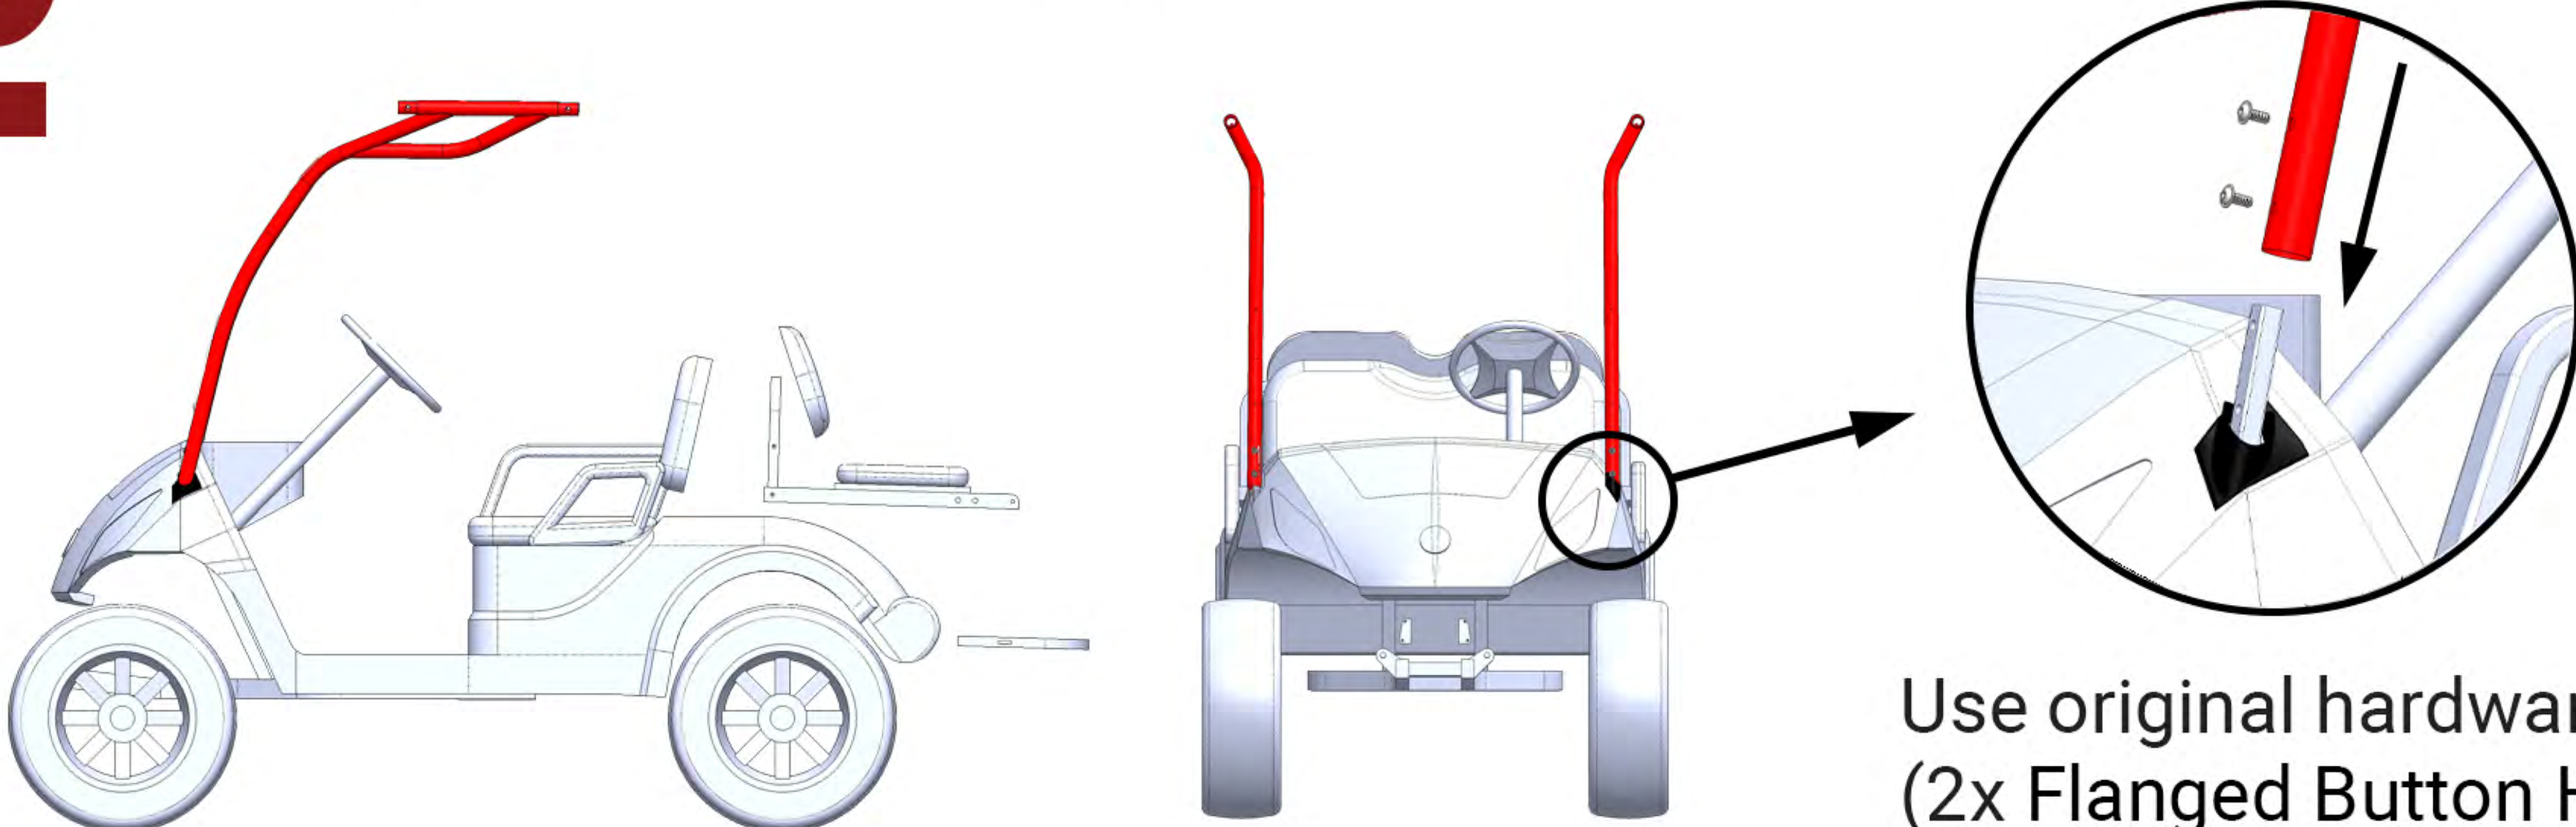

Use original hardware to fasten (2x Flanged Button Head Cap Screw).

3


Loosely assemble **Arm Rests**. **52D/52P**

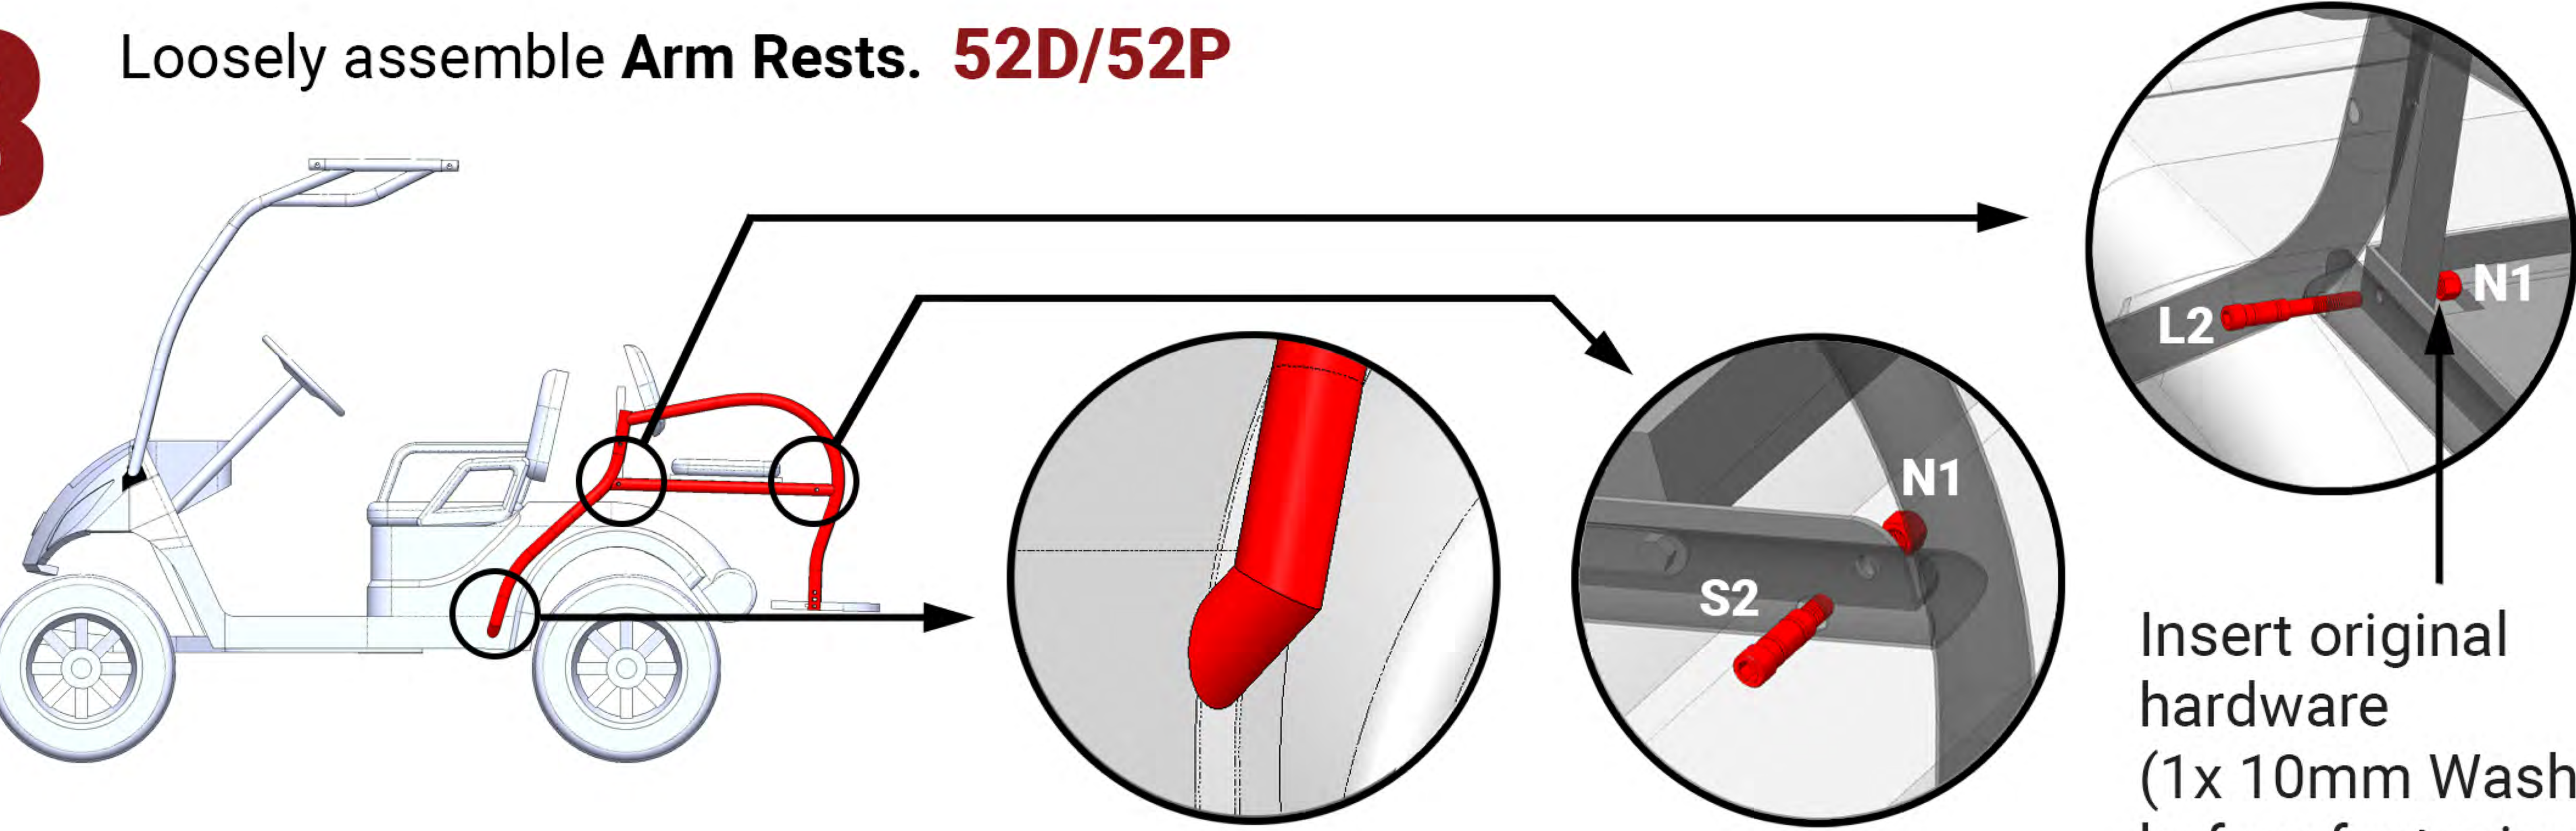

Insert original hardware (1x 10mm Washer) before fastening Lock Nut.

4


Loosely assemble **Hex Mounts** to end of arm rest and re-attach your rear seat footrest. **53D/53P**

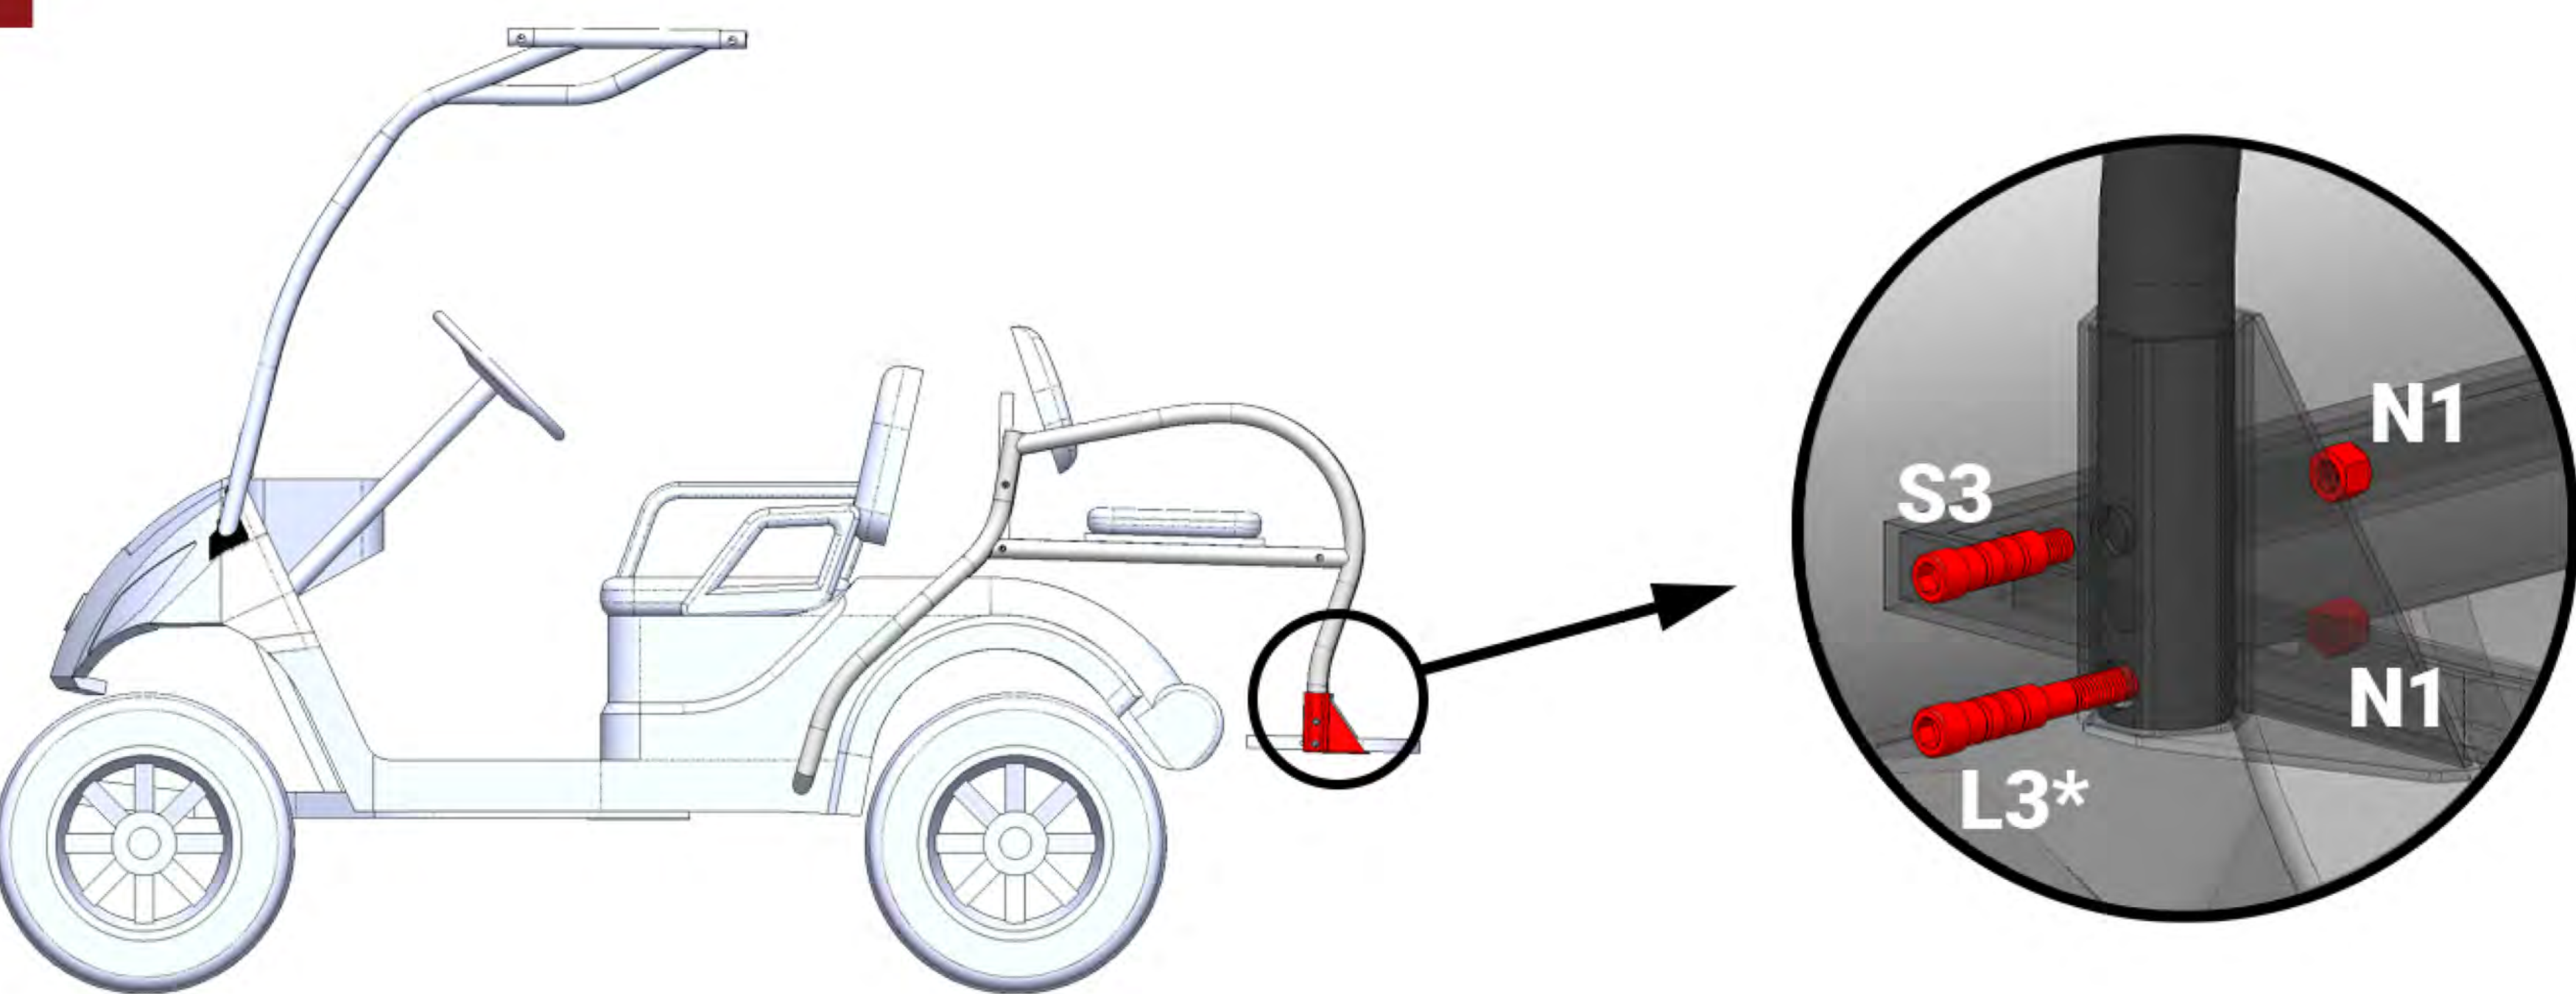

*L3 hardware piece is used with the MODZ Flip4 rear seat. For MadJax Genesis 150 or GTW rear flip seat, replace with L4.

5

Loosely assemble **Rear Uprights** to the top of the Arm Rests. **54D/54P**

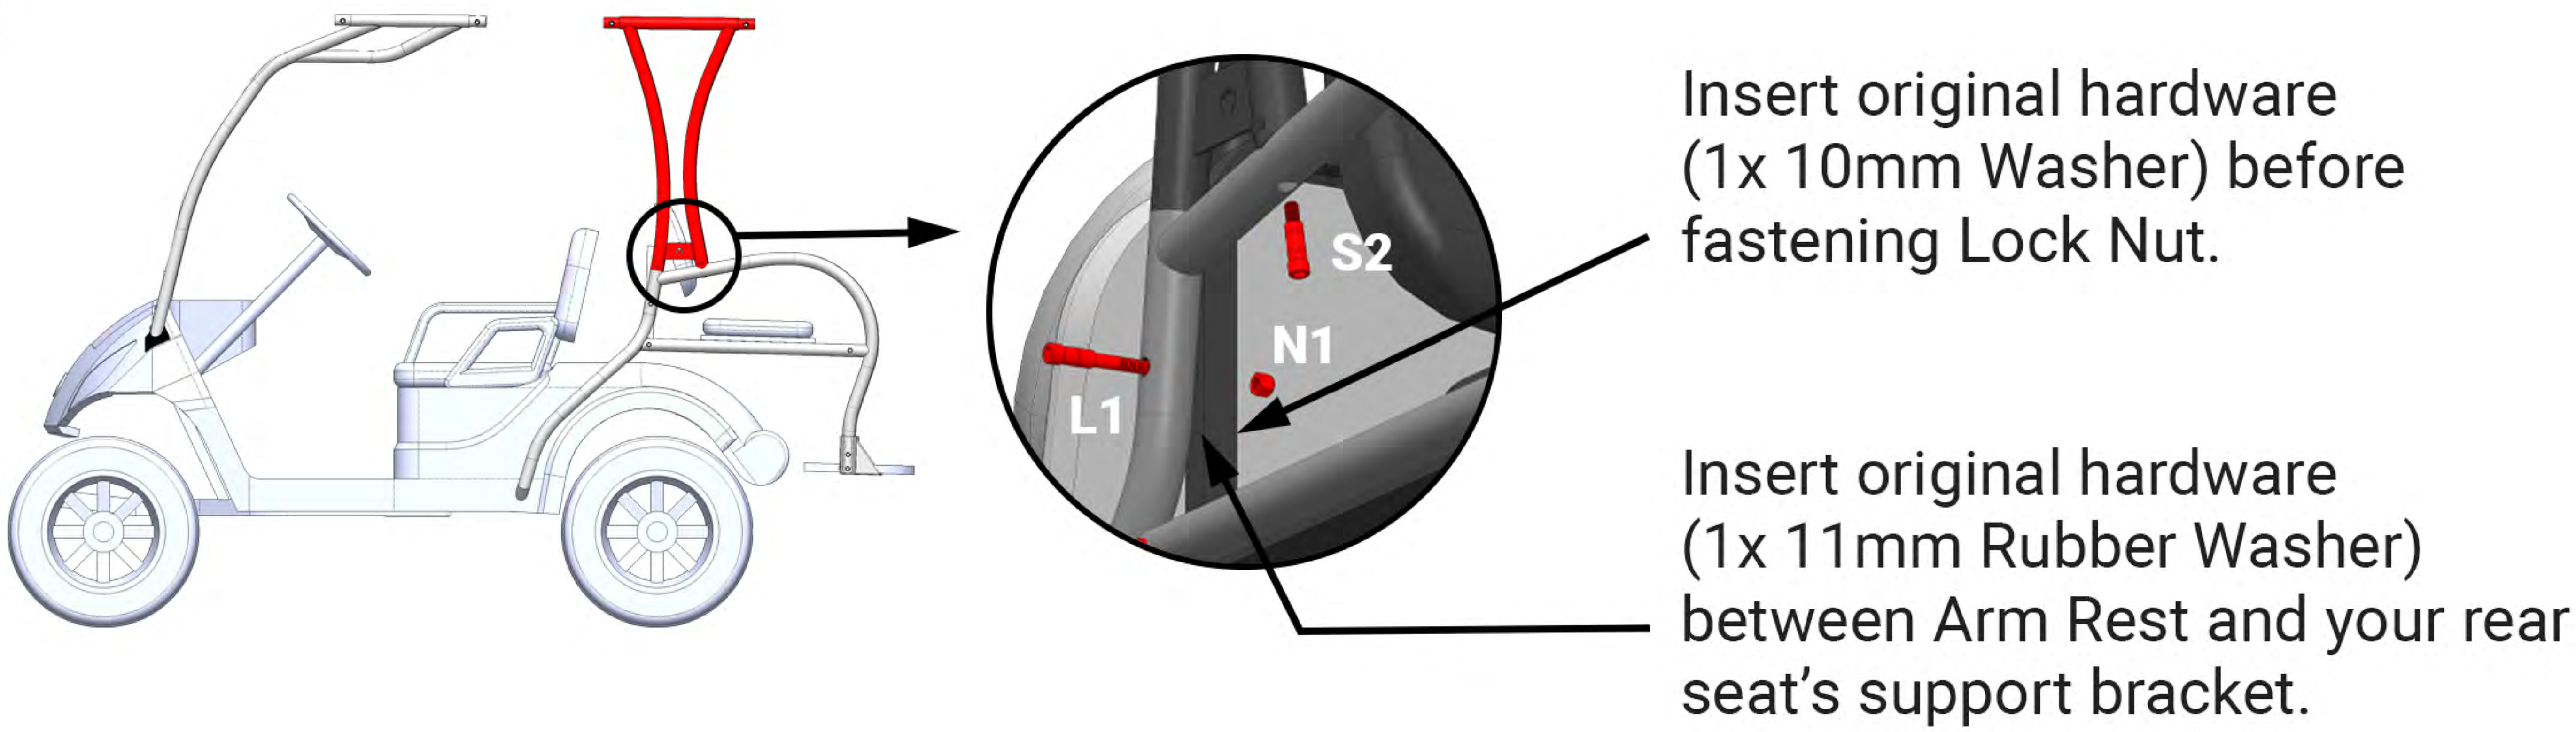


Insert original hardware (1x 10mm Washer) before fastening Lock Nut.

Insert original hardware (1x 11mm Rubber Washer) between Arm Rest and your rear seat's support bracket.

6


Loosely assemble **Top Center** between Front and Rear Uprights. **55**

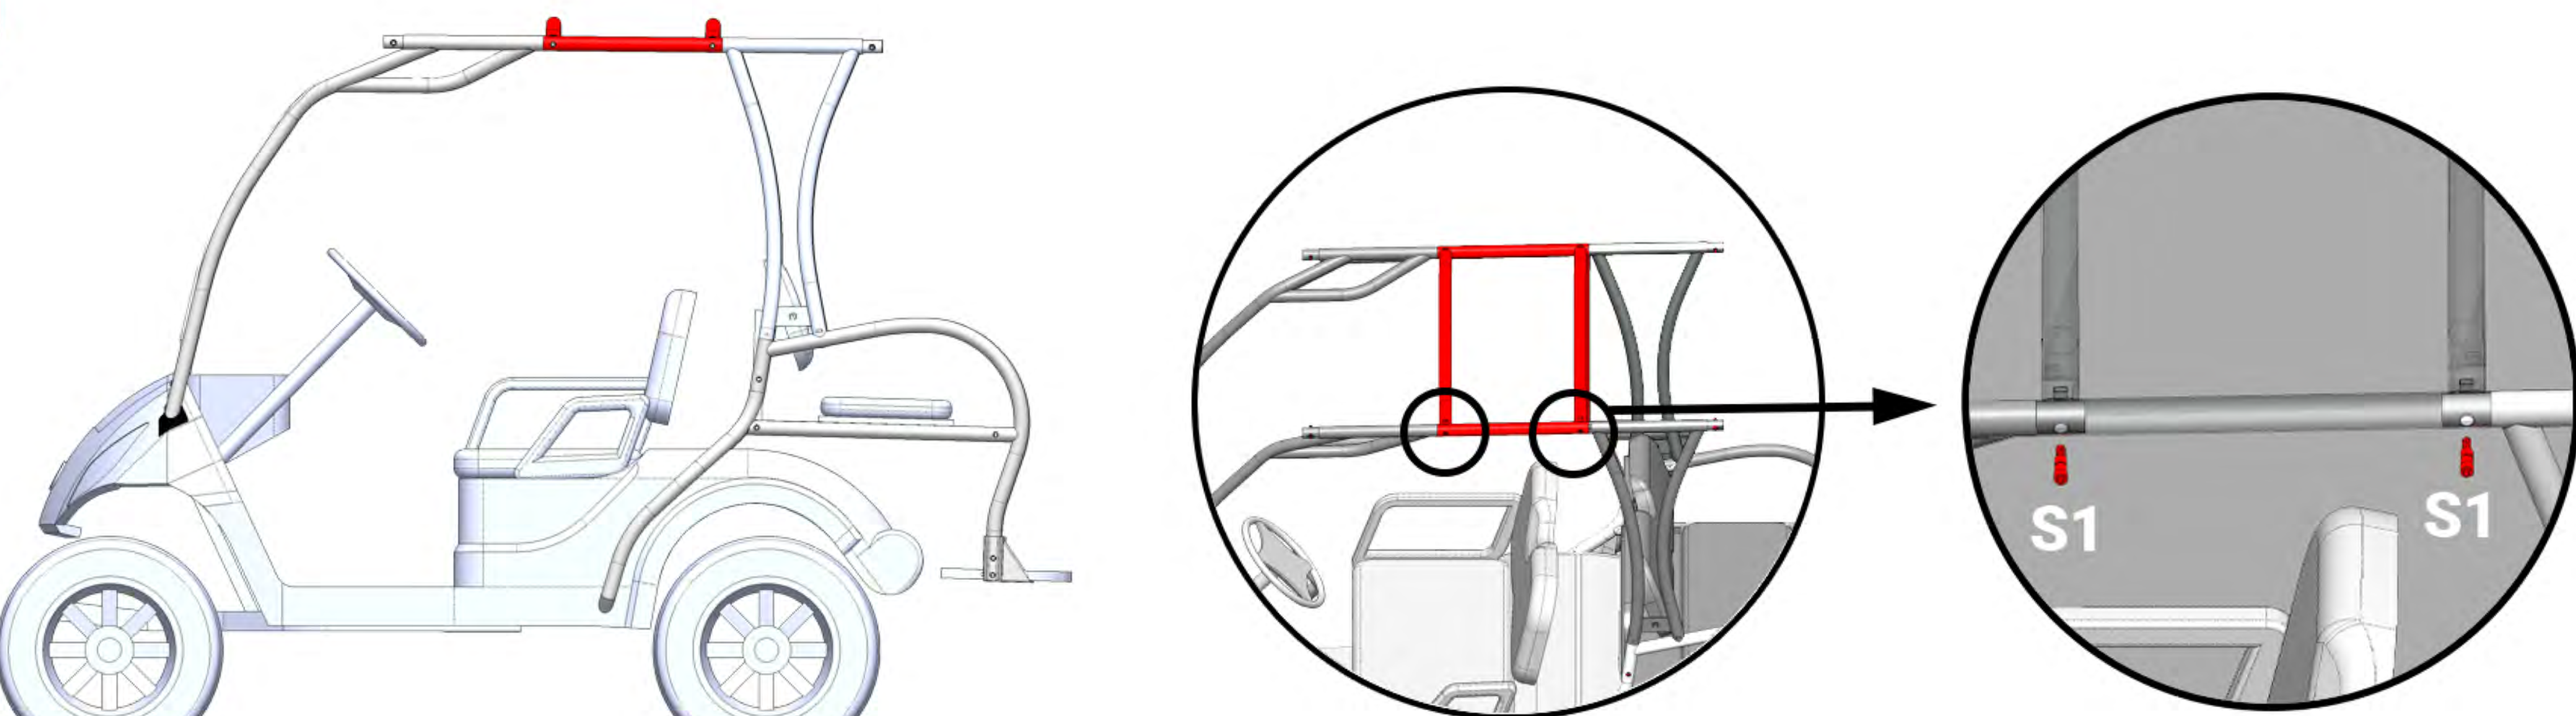

NOTE: Additional washers may need to be installed beneath rear seat supports to align top center and upright connections.

7

Loosely assemble **Top Ends** to the Front and Rear Uprights. **56**

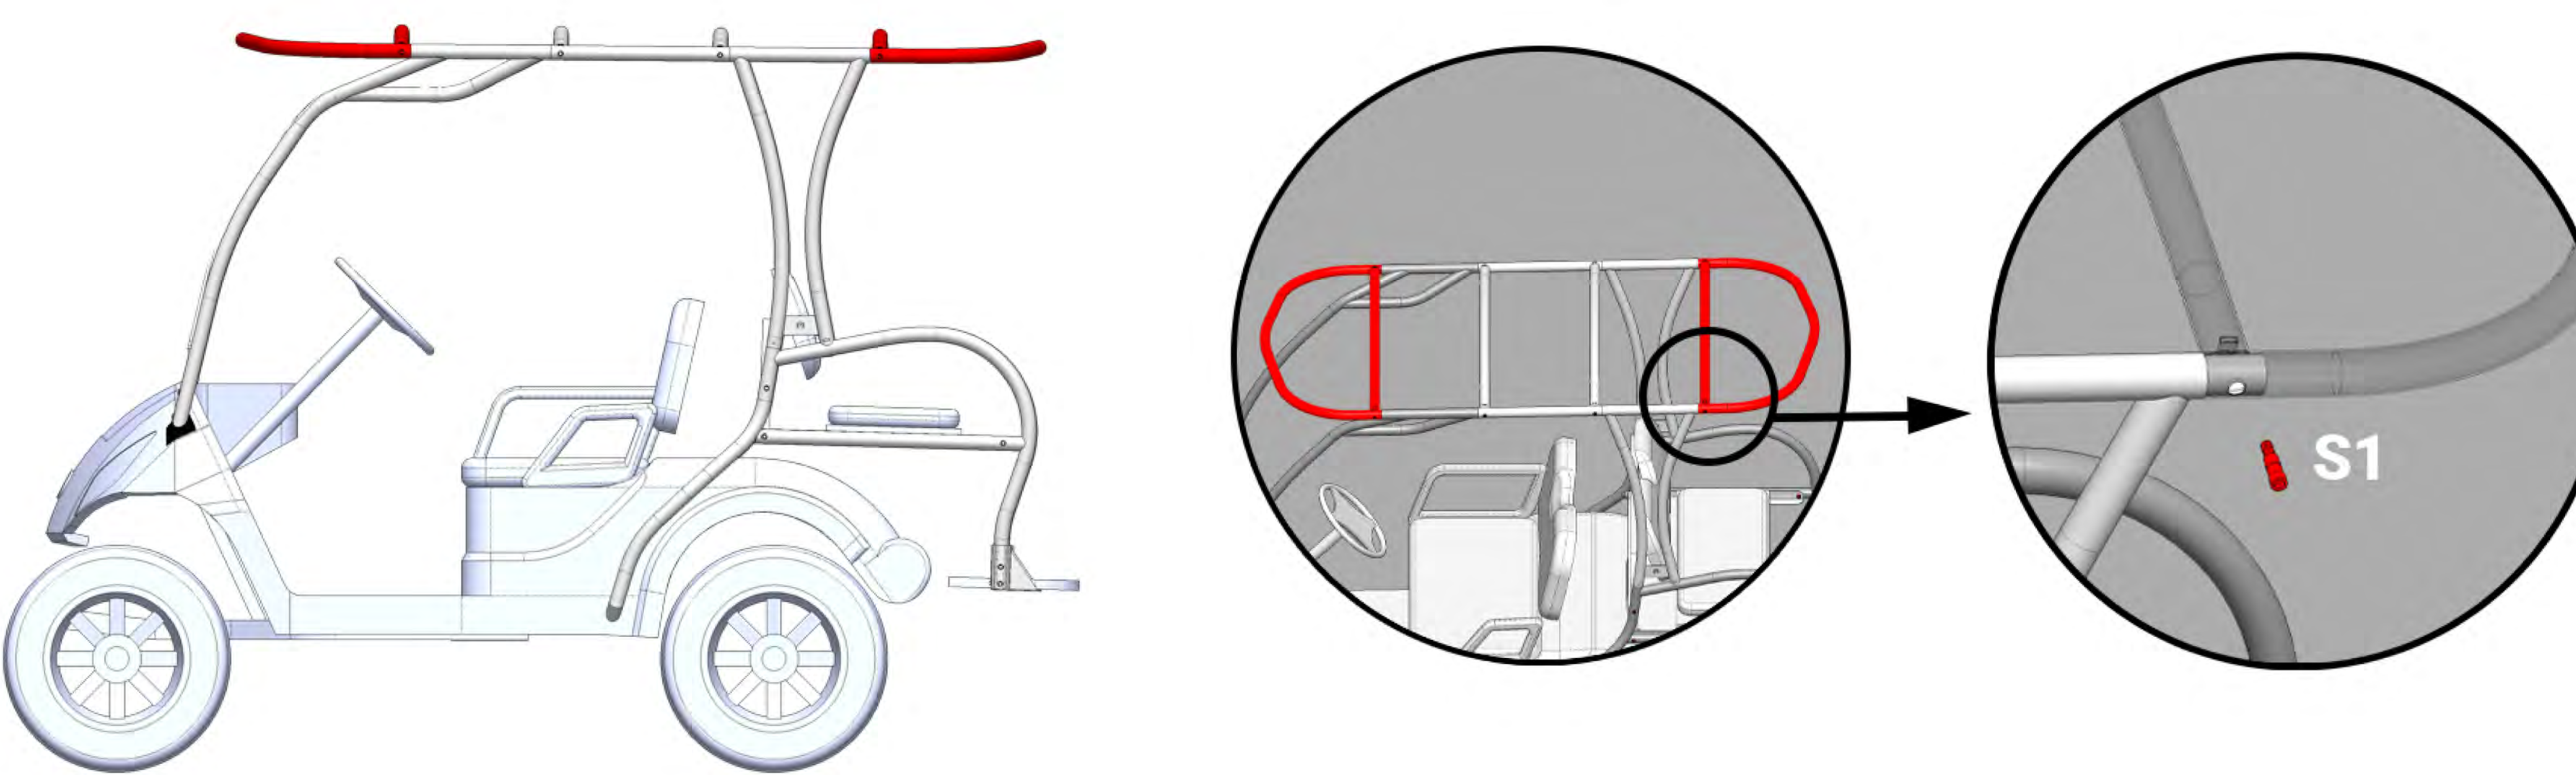

8

With all parts in place, fully tighten all hardware to complete body assembly. Install **Canvas Top** with the shorter zipper towards the front of the cart and the curved zipper at the back end of the cart. **57**

Do not install additional weight to the Tower Top frame as this will cause additional wear and tear over time.

WARNING:

Please have installation performed by a professional mechanic. This roof system is not load-bearing. This roof system will not provide protection in the event of a rollover. Do not carry items or persons on top of the roof system. Installation of the roof system will raise the vehicle's center of gravity. Please use extreme caution when encountering driving conditions which may cause vehicle imbalance. It is imperative that the operator and passengers remain seated, keep their arms and legs within the vehicle, and wear a seatbelt. It is the owner's responsibility to caution and warn any potential driver of the vehicle about these driving and handling conditions. Golf Cart King advises that you check your state and local ordinances prior to installing a suspension kit or other aftermarket vehicle modification.

CALIFORNIA PROP 65 WARNING:

WARNING: Operating, servicing and maintaining a passenger vehicle or off-highway motor vehicle can expose you to chemicals including engine exhaust, carbon monoxide, phthalates, and lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. To minimize exposure, avoid breathing exhaust, do not idle the engine except as necessary, service your vehicle in a well-ventilated area and wear gloves or wash your hands frequently when servicing your vehicle. For more information go to www.P65Warnings.ca.gov/passenger-vehicle.